

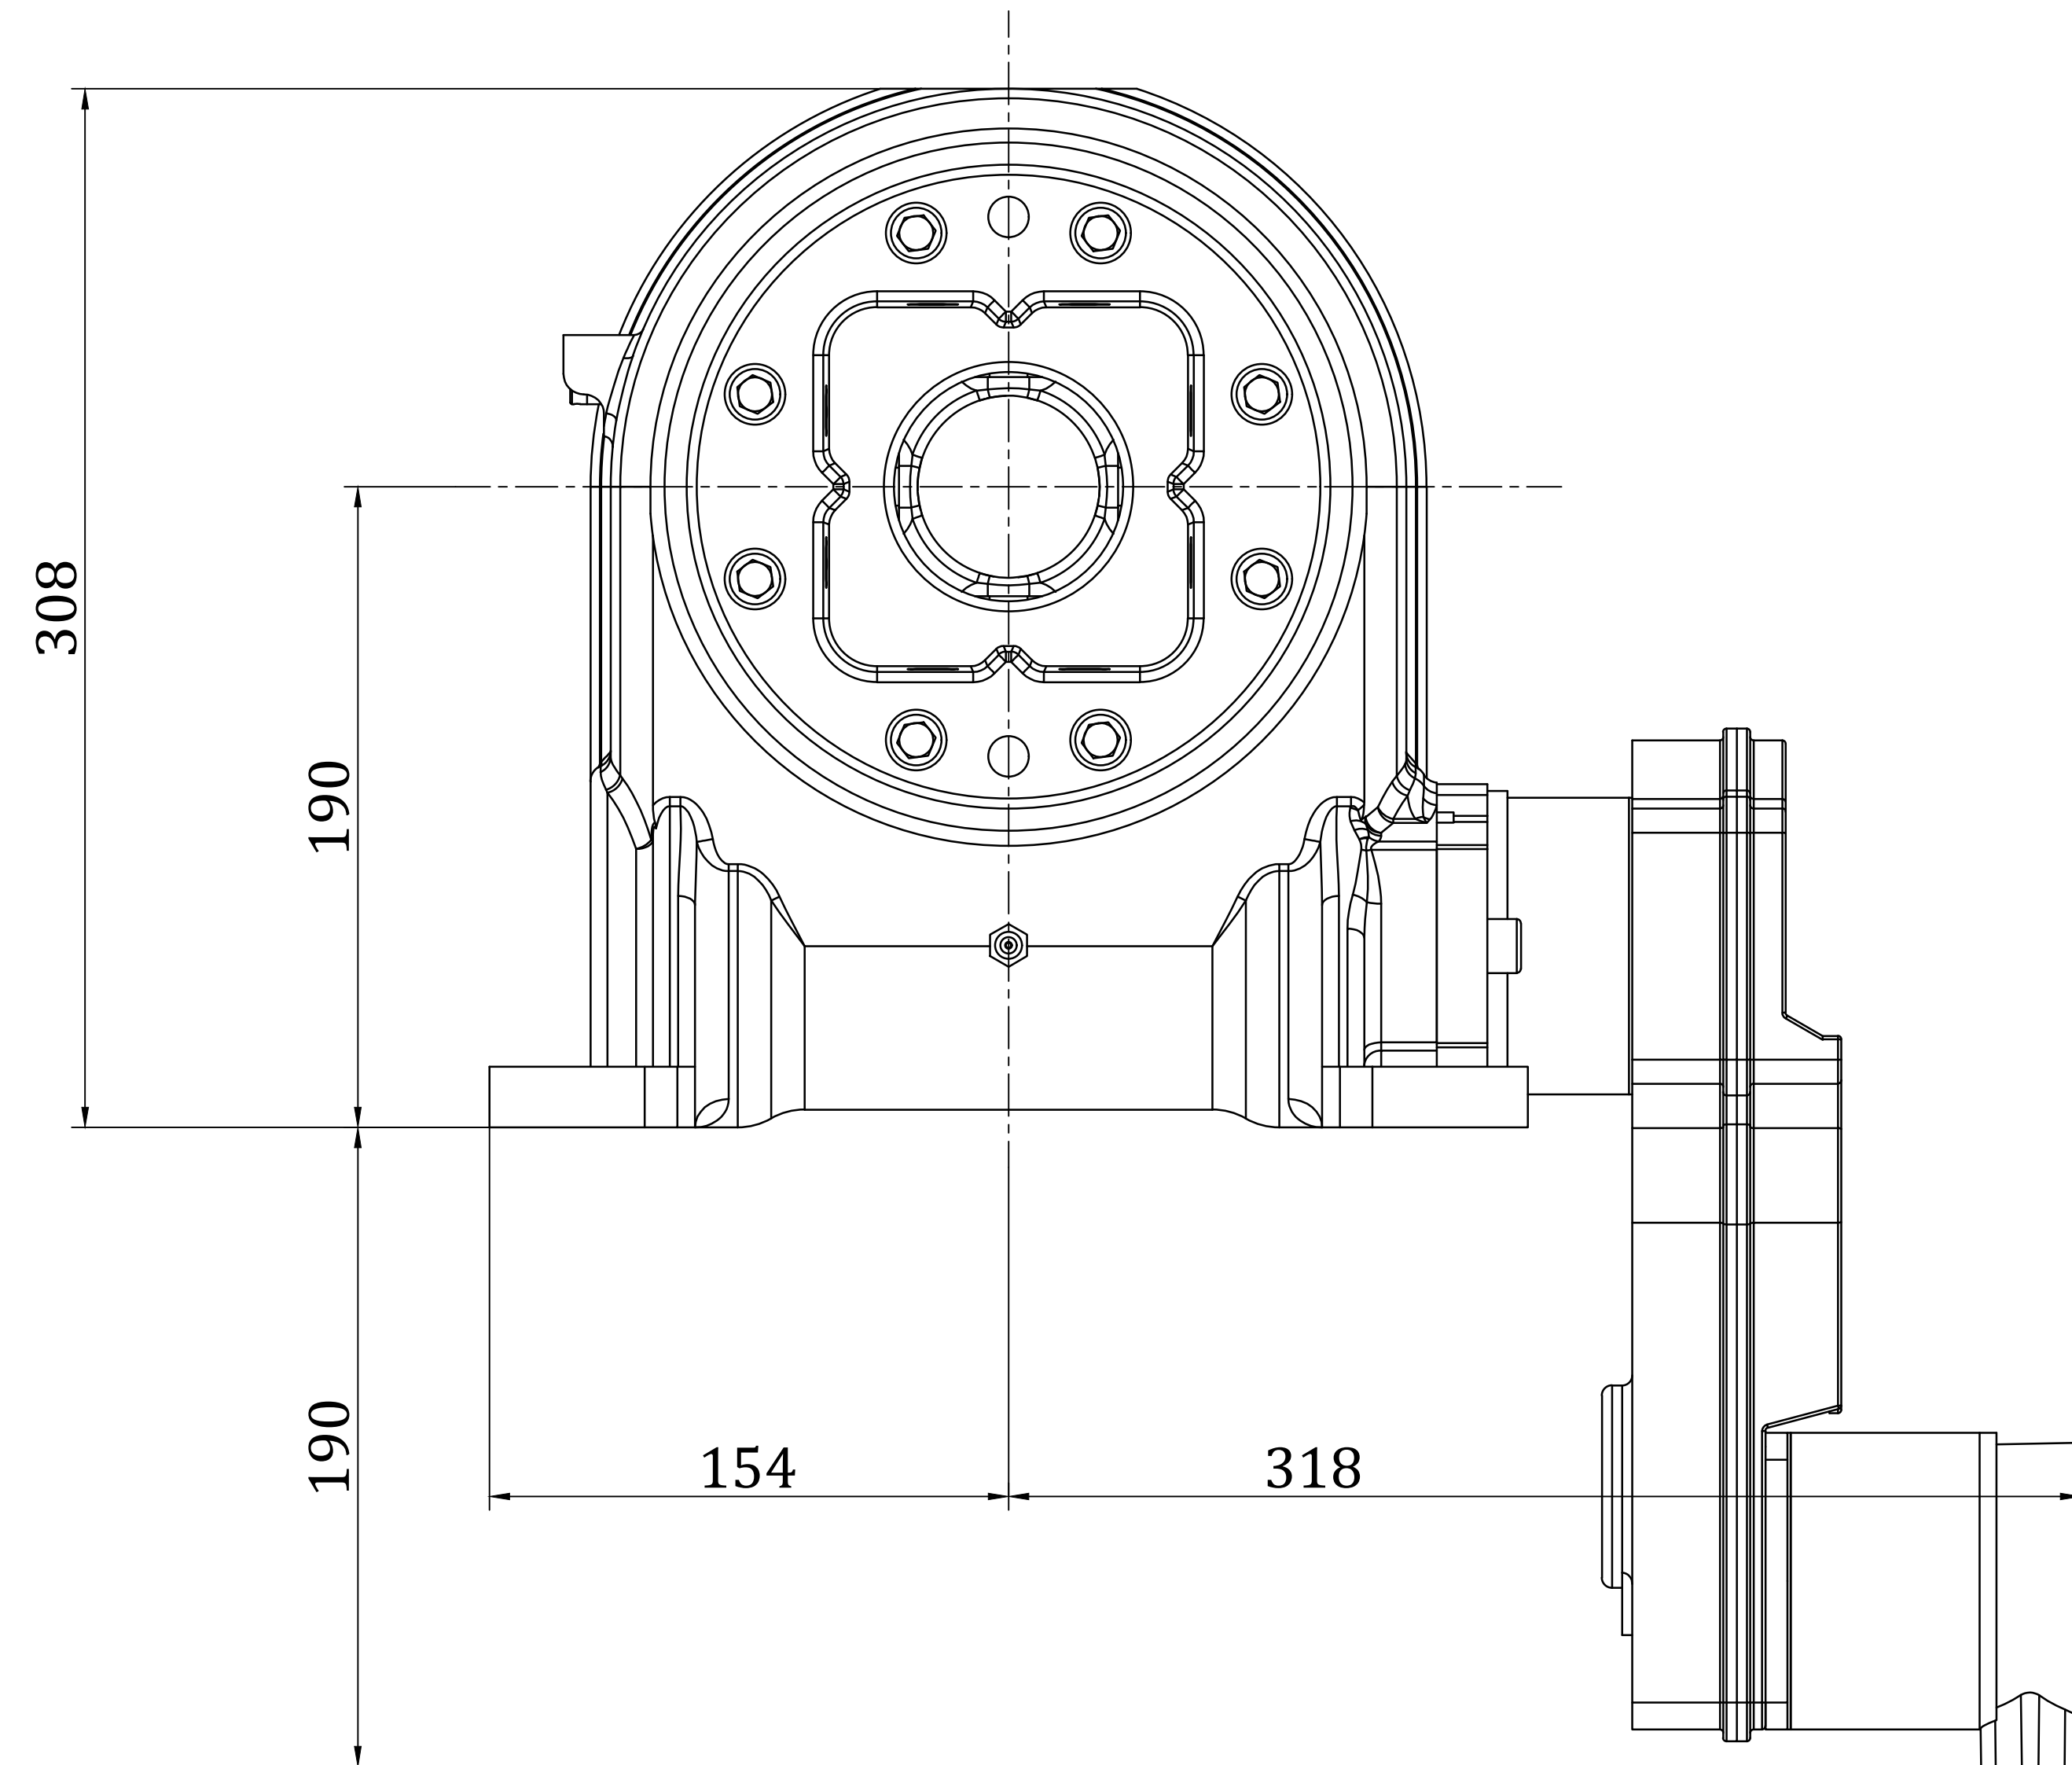
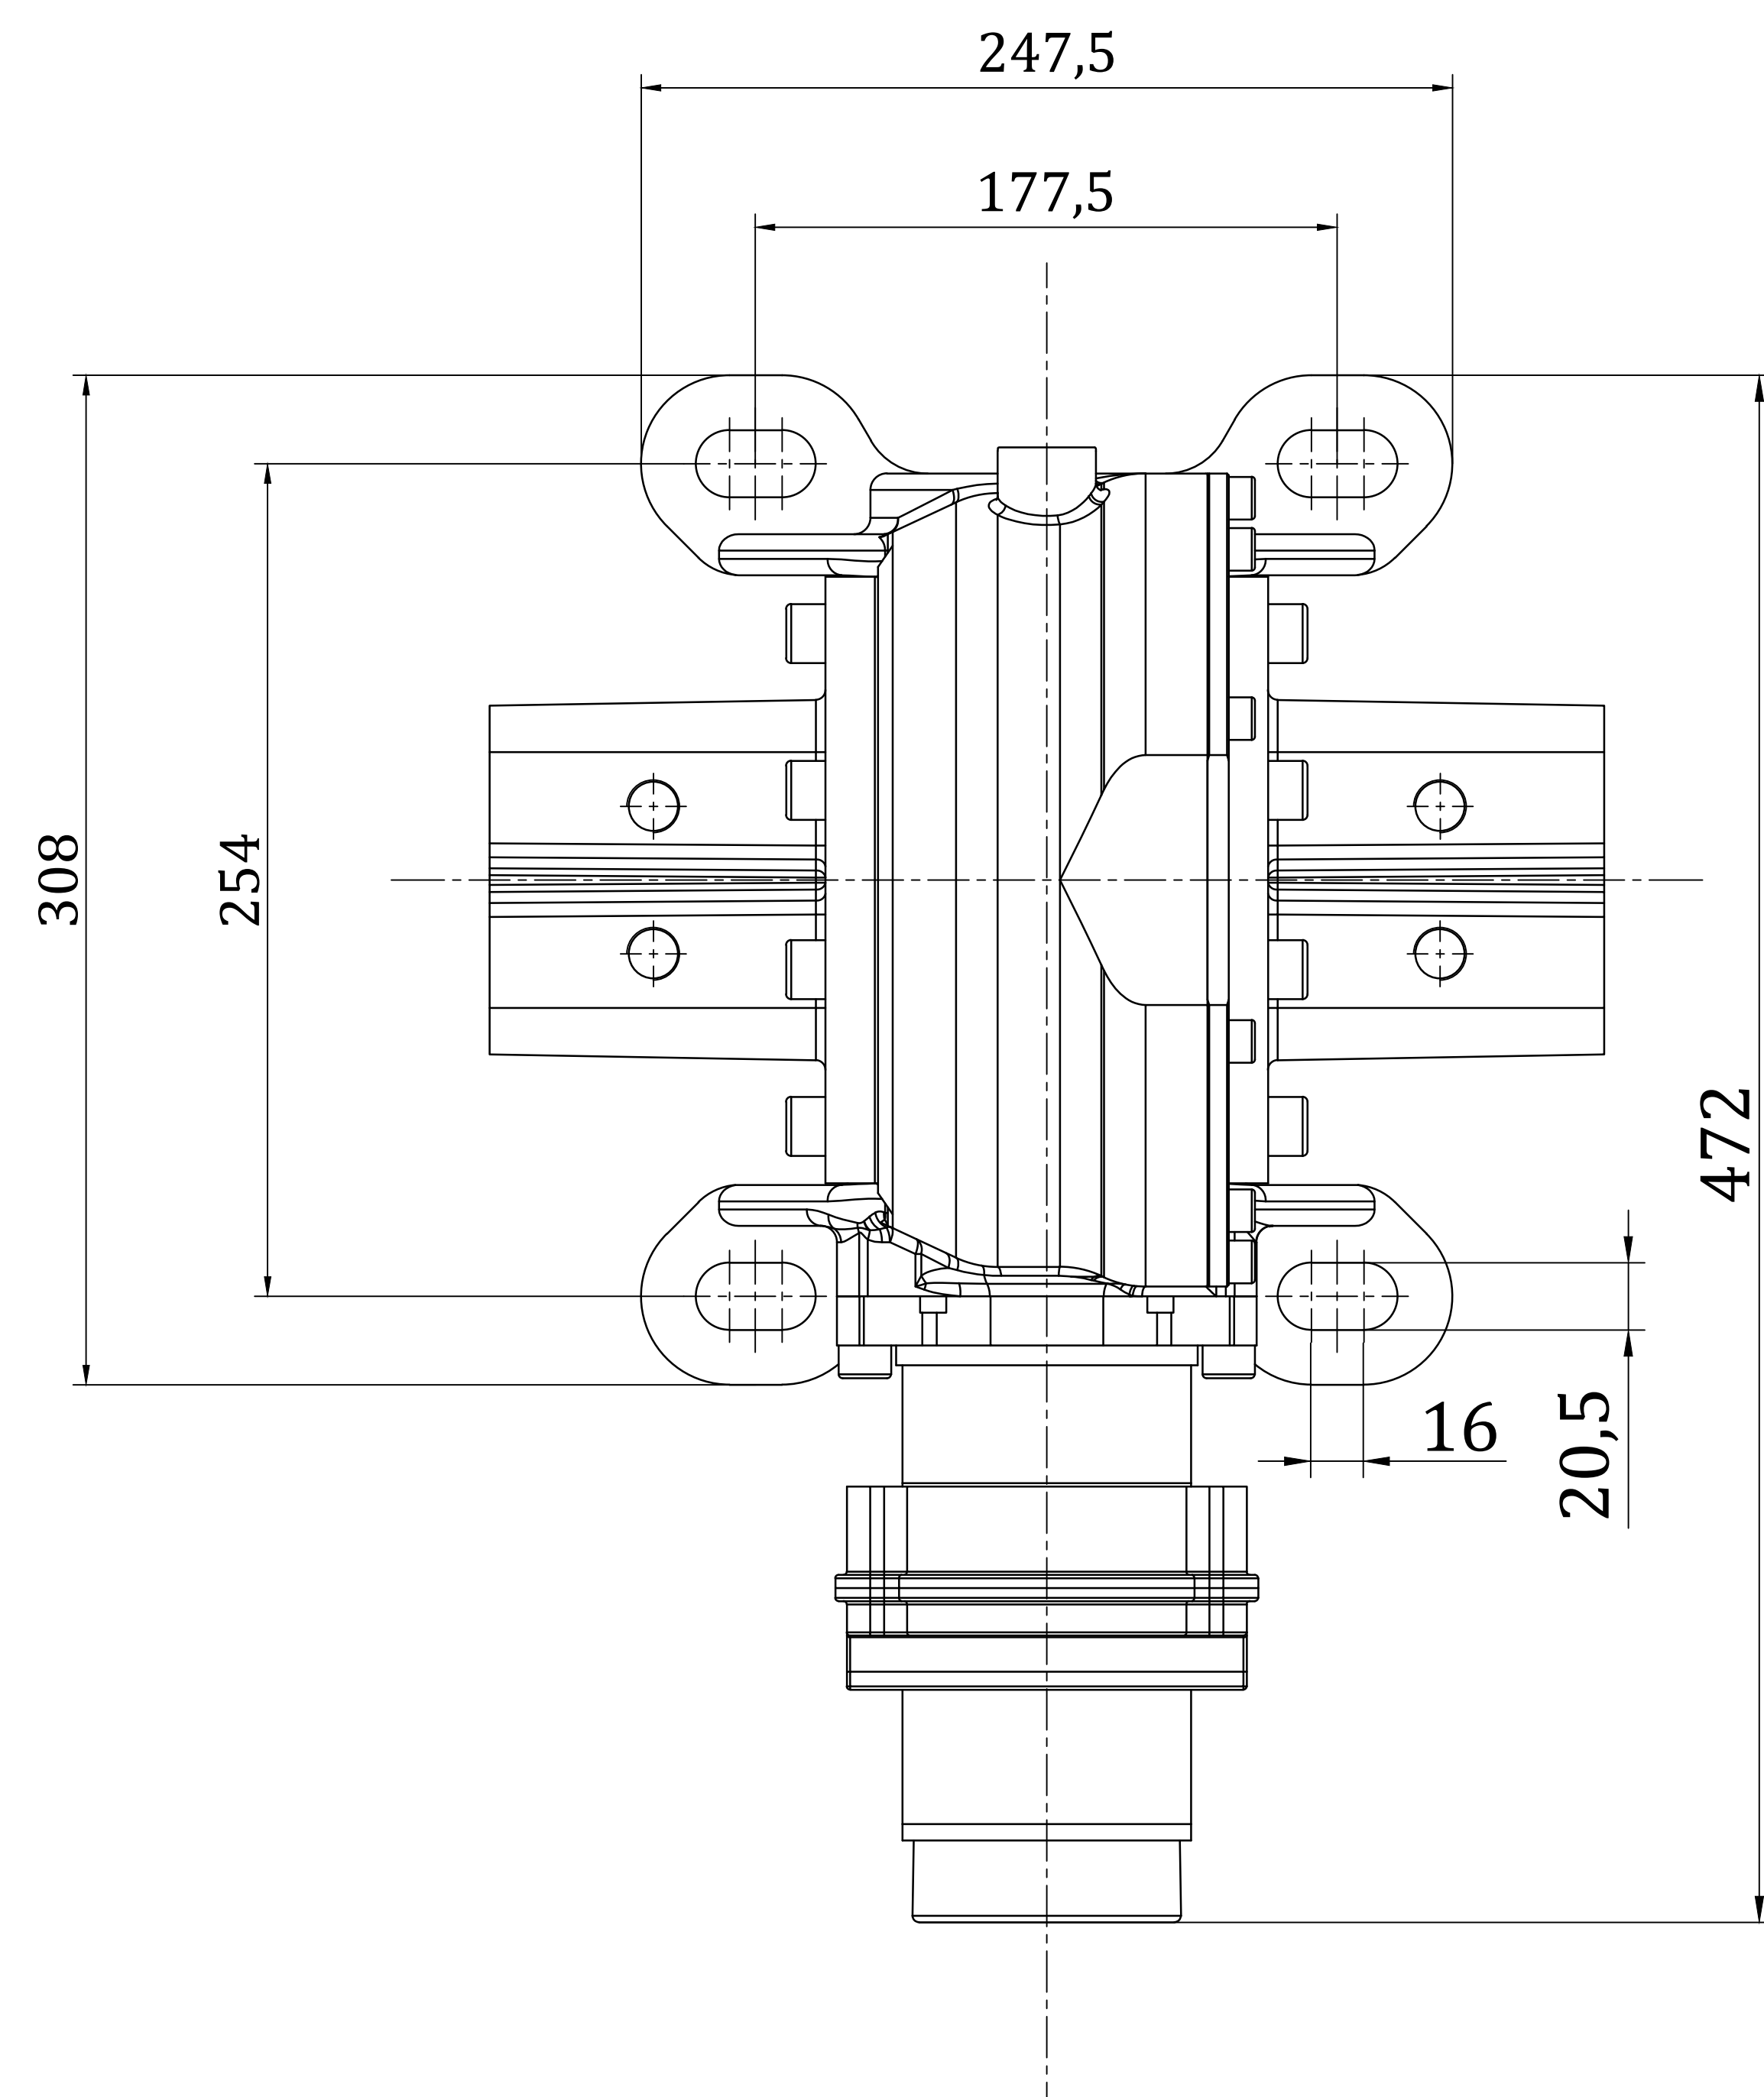
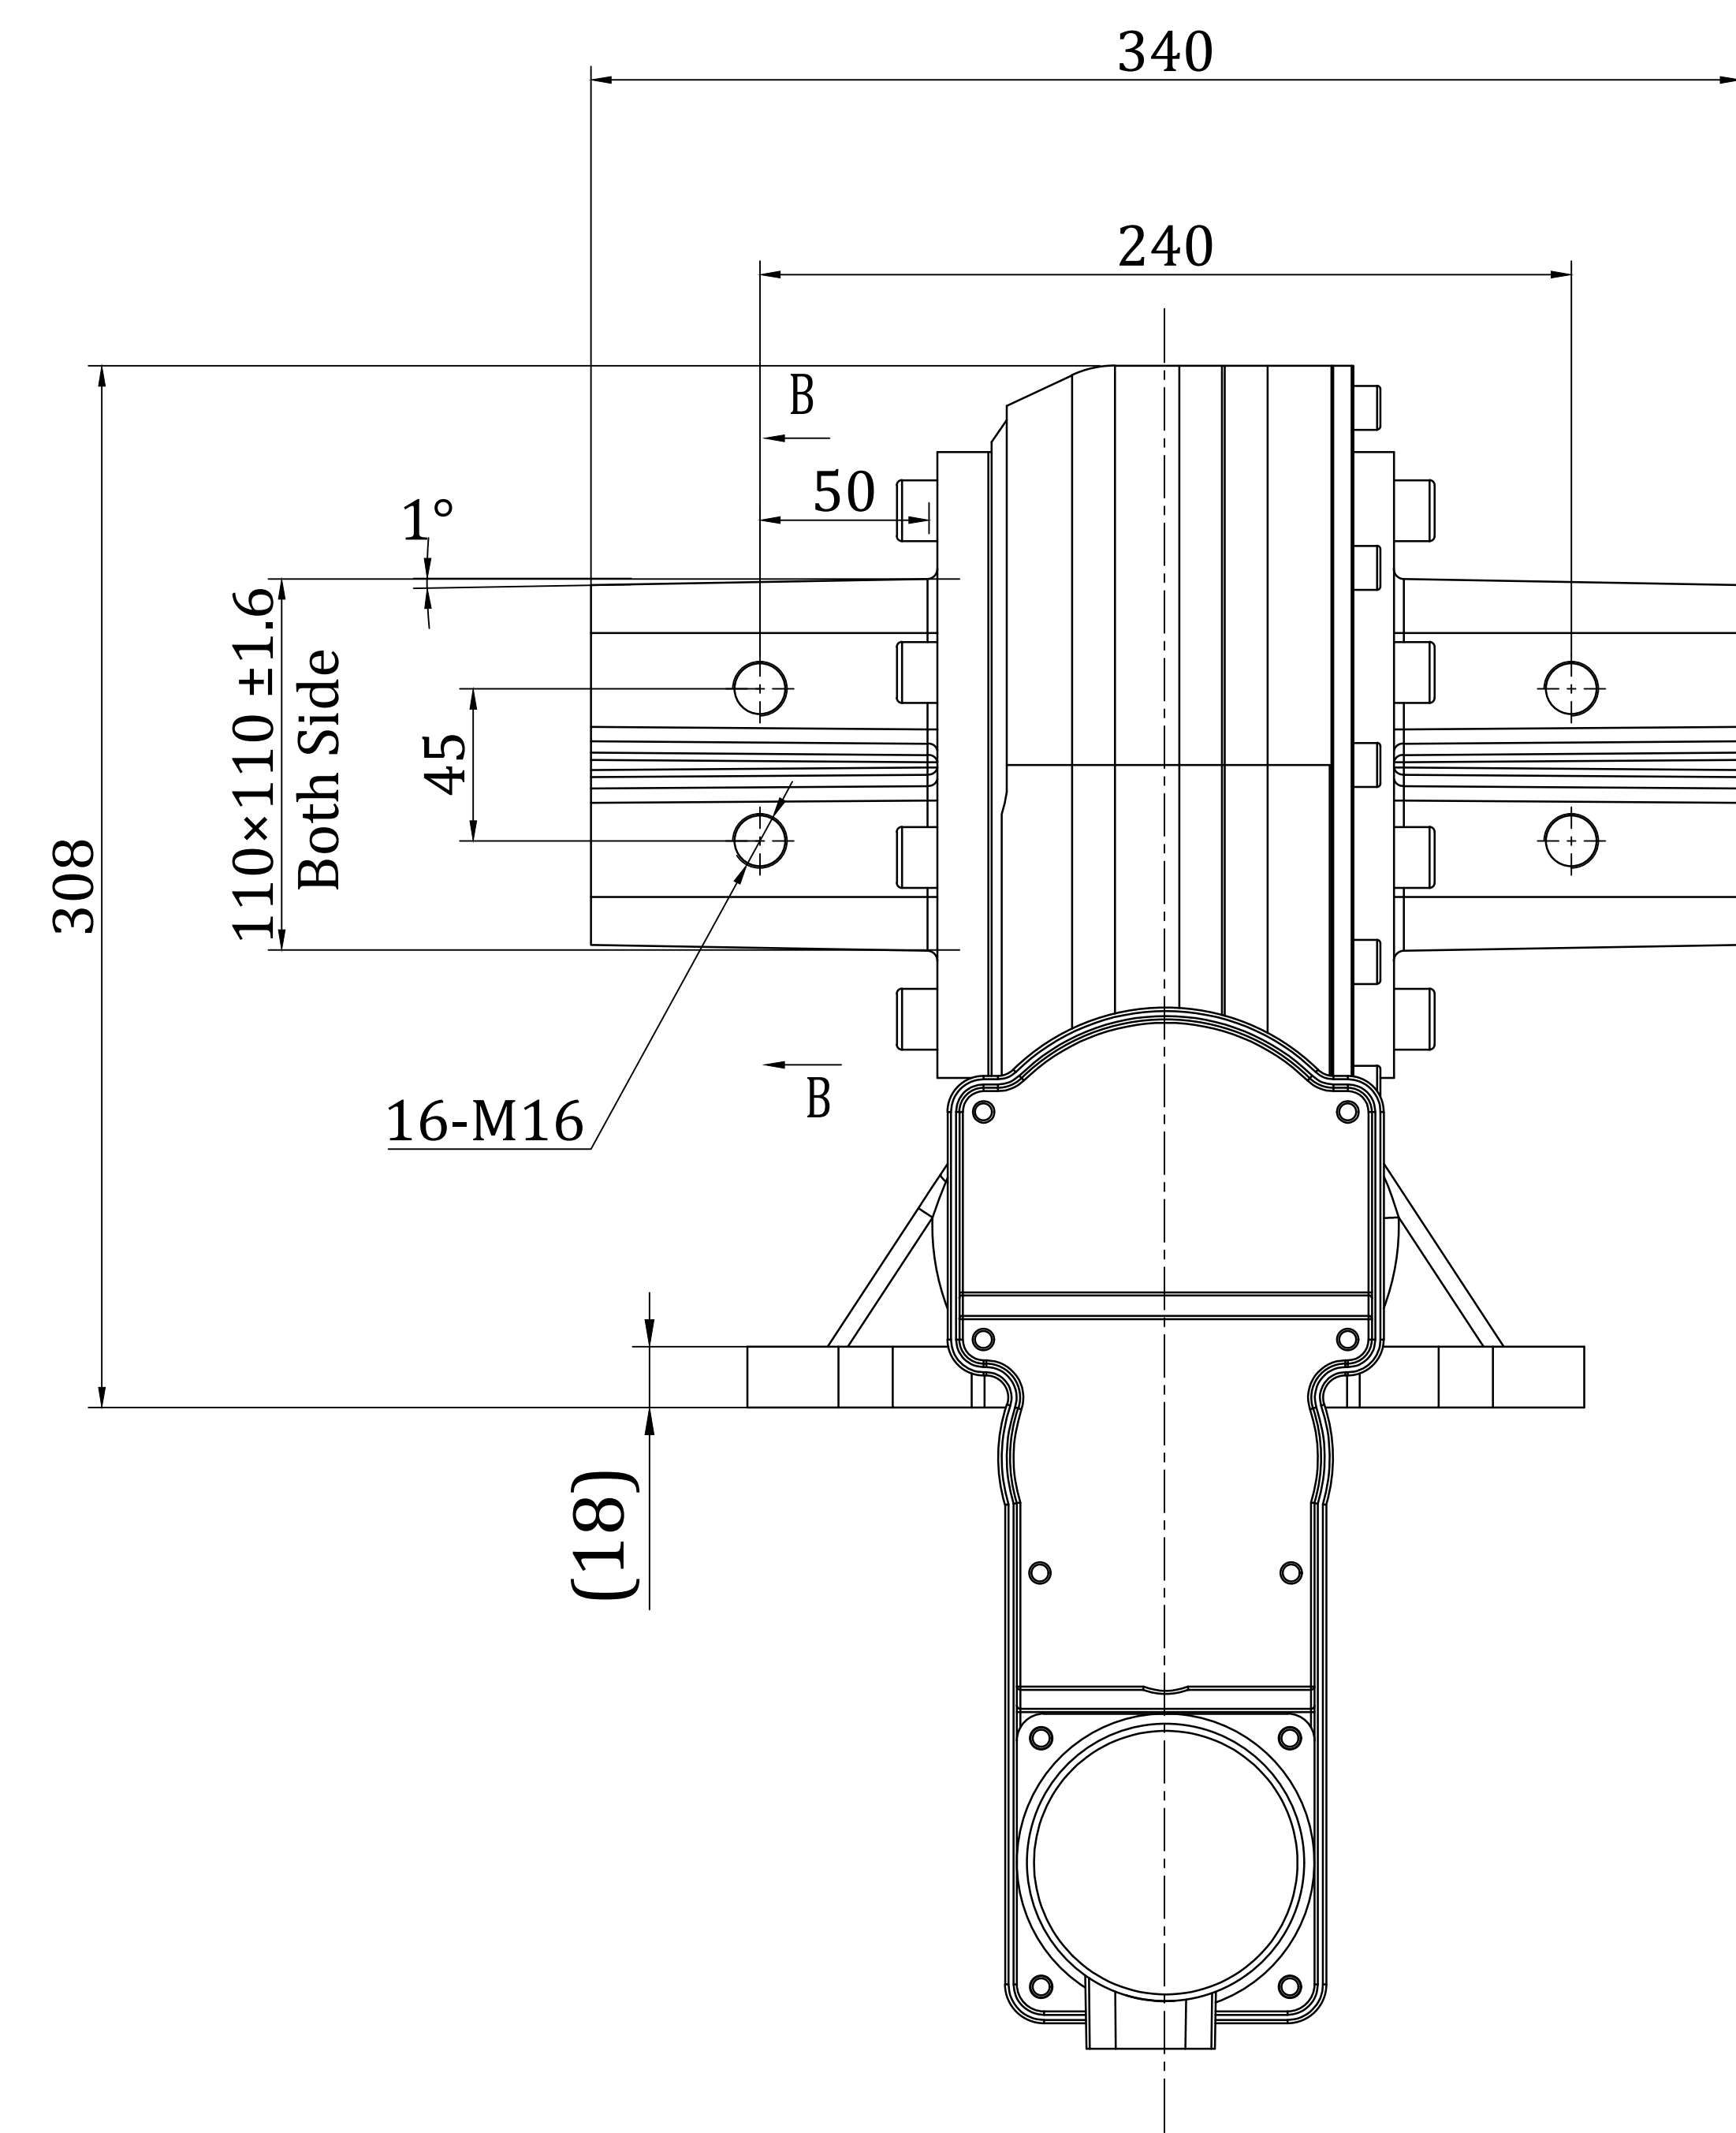
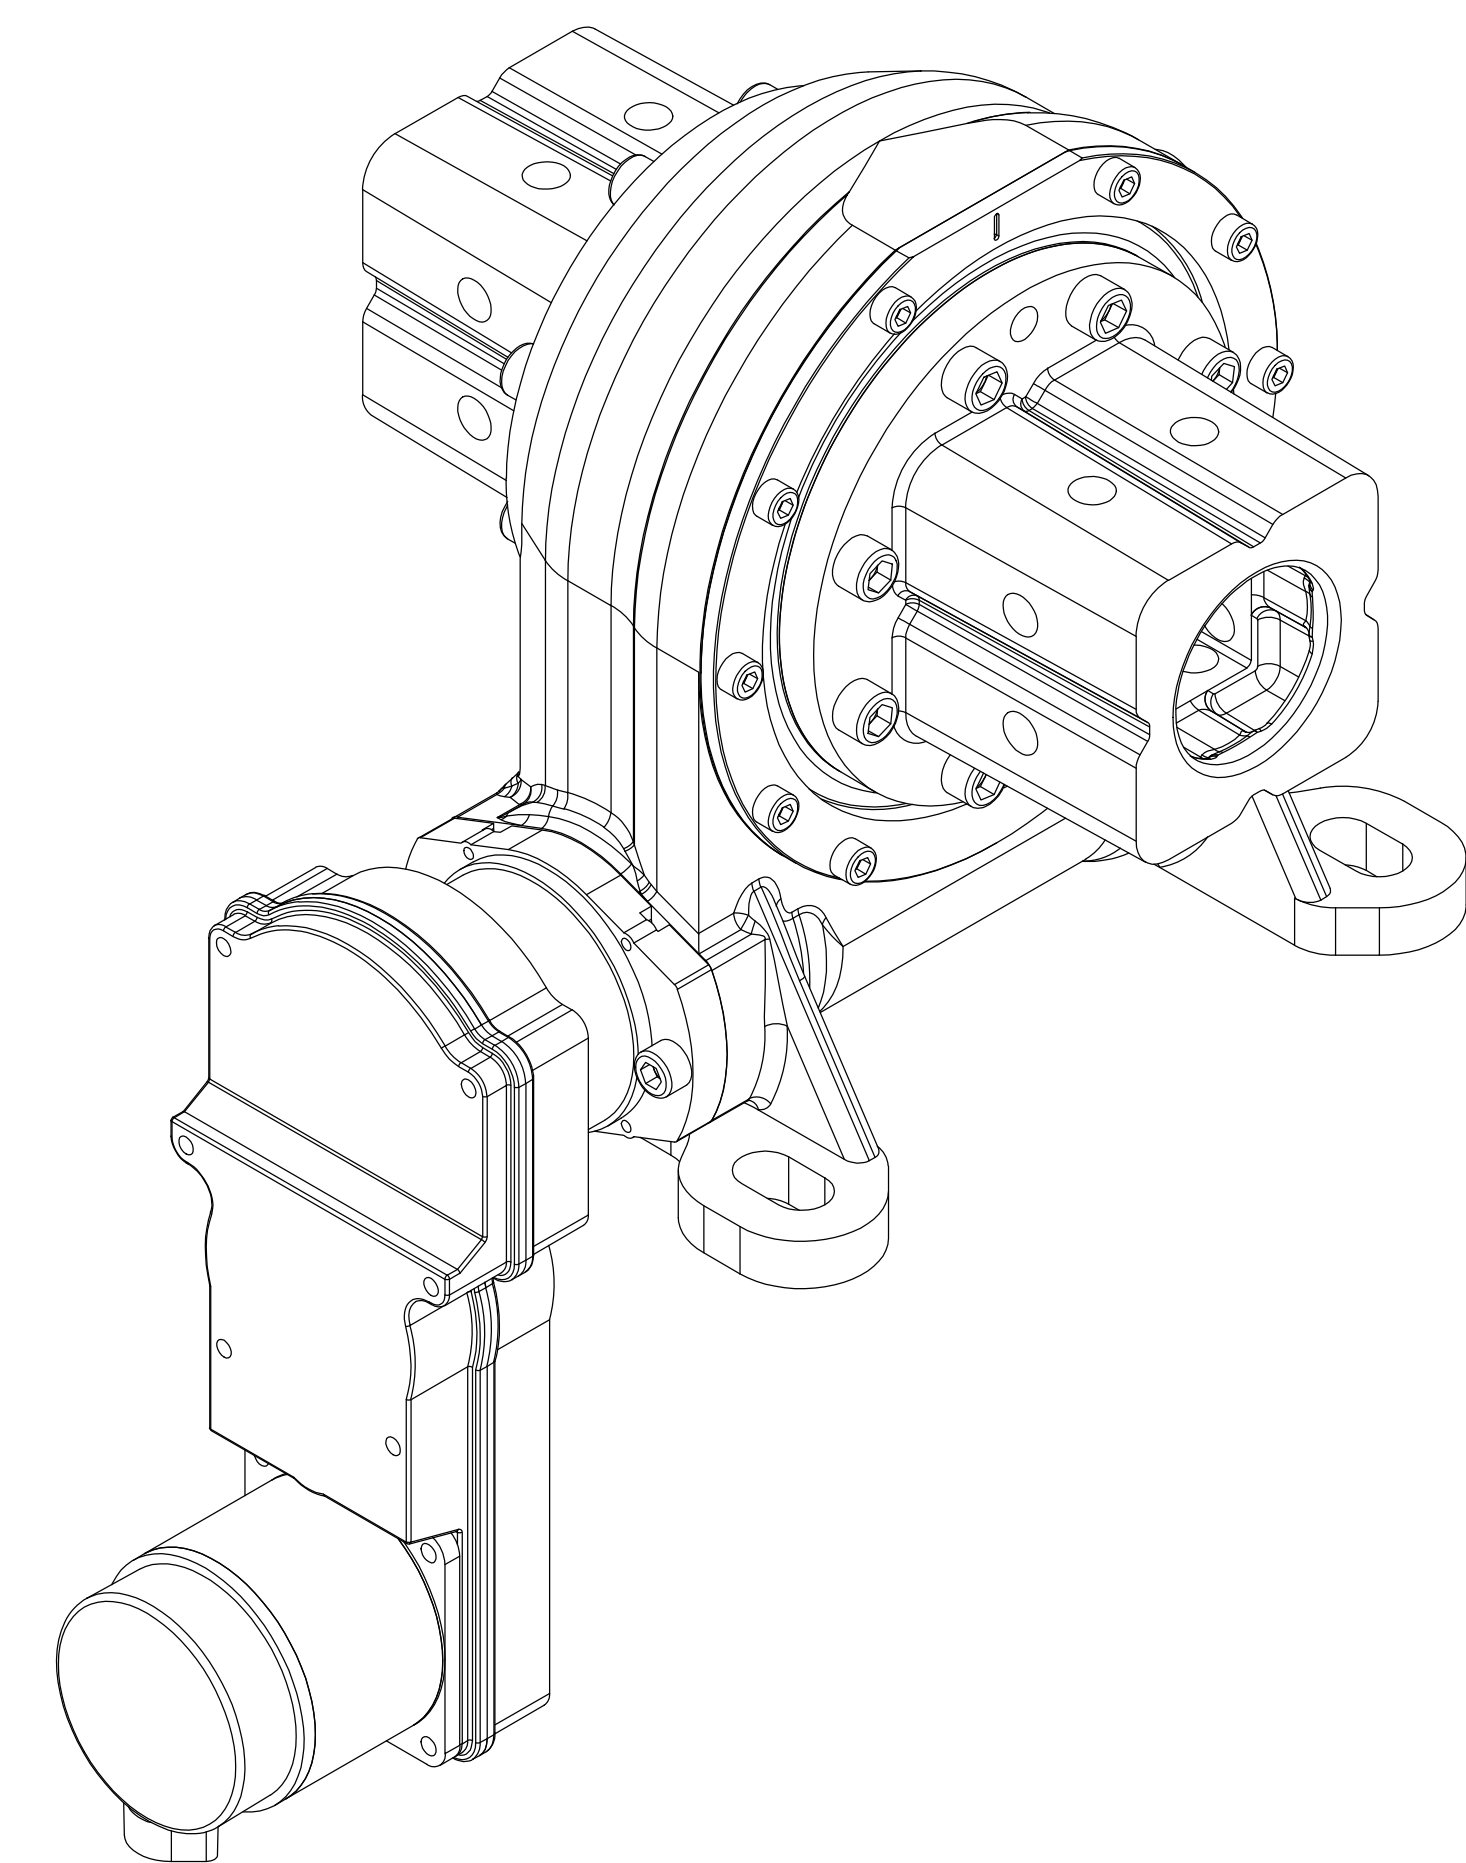
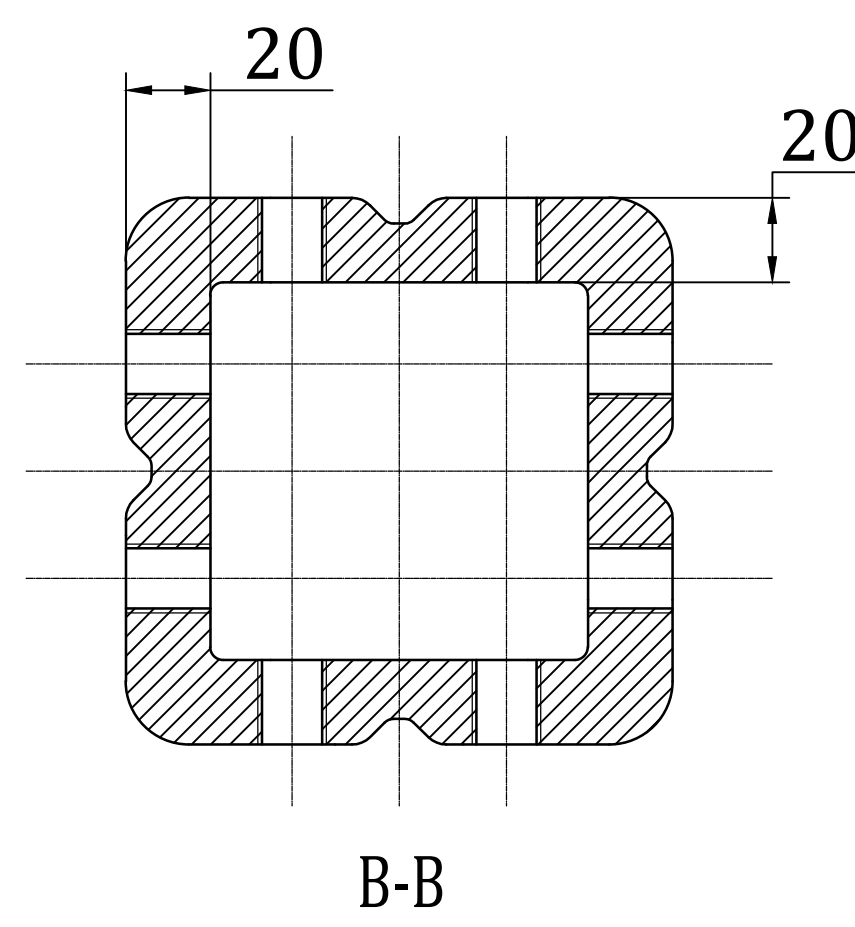




Wire Define		
Pin 1 (black)	motor	—
Pin 2 (red)	motor	+
Pin E (yellow/green)	GND	



Slewing Drive Performance Parameters	
Rated Output Speed	0,025 rpm
Rated Output Torque	6300 N.m
Tilting Moment	10 kN.m
Holding Torque	48 kN.m
Static Axial Rating	180 kN
Static Radial Rating	90 kN
IP Class	IP 65
Corrison Protection	C3
Temperature	-30°C~+90°C
Gear Ratio	60 : 1
Hard Limit	±60°
Precision	≤ 0.17 °
24VDC Motor Performance Data	
Rated Output Torque	300 N.m
Rated Output Speed	1.5 rpm
Rated Current	≤ 4A
IP Class	IP 65

REV	DATE	REVISER	REVISER			
DESIGNED BY	2020/01/01	Li Ming	 www.coresundrive.com Coresun Drive Equipment Changzhou Co.,Ltd.			
CHECKED BY	2020/01/01	Rui Wang				
APPROVED BY	2020/01/01	Shane Zhang				
ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER HERE OF ARE RESERVED, AND NO PERMISSION IS GRANTED OR TO DISCLOSE REPRODUCE THIS PRINT IN WHOLE OR IN PART, ANY OF THE INFORMATION TO OTHERS.			WEIGHT	SCALE	Slewing Drive	
				1 : 5		
SYMBOLE ISO	 		SIZE	A3	VH8-60S110-RC-24V-A359	REV A
			SHEET	1 / 1		