
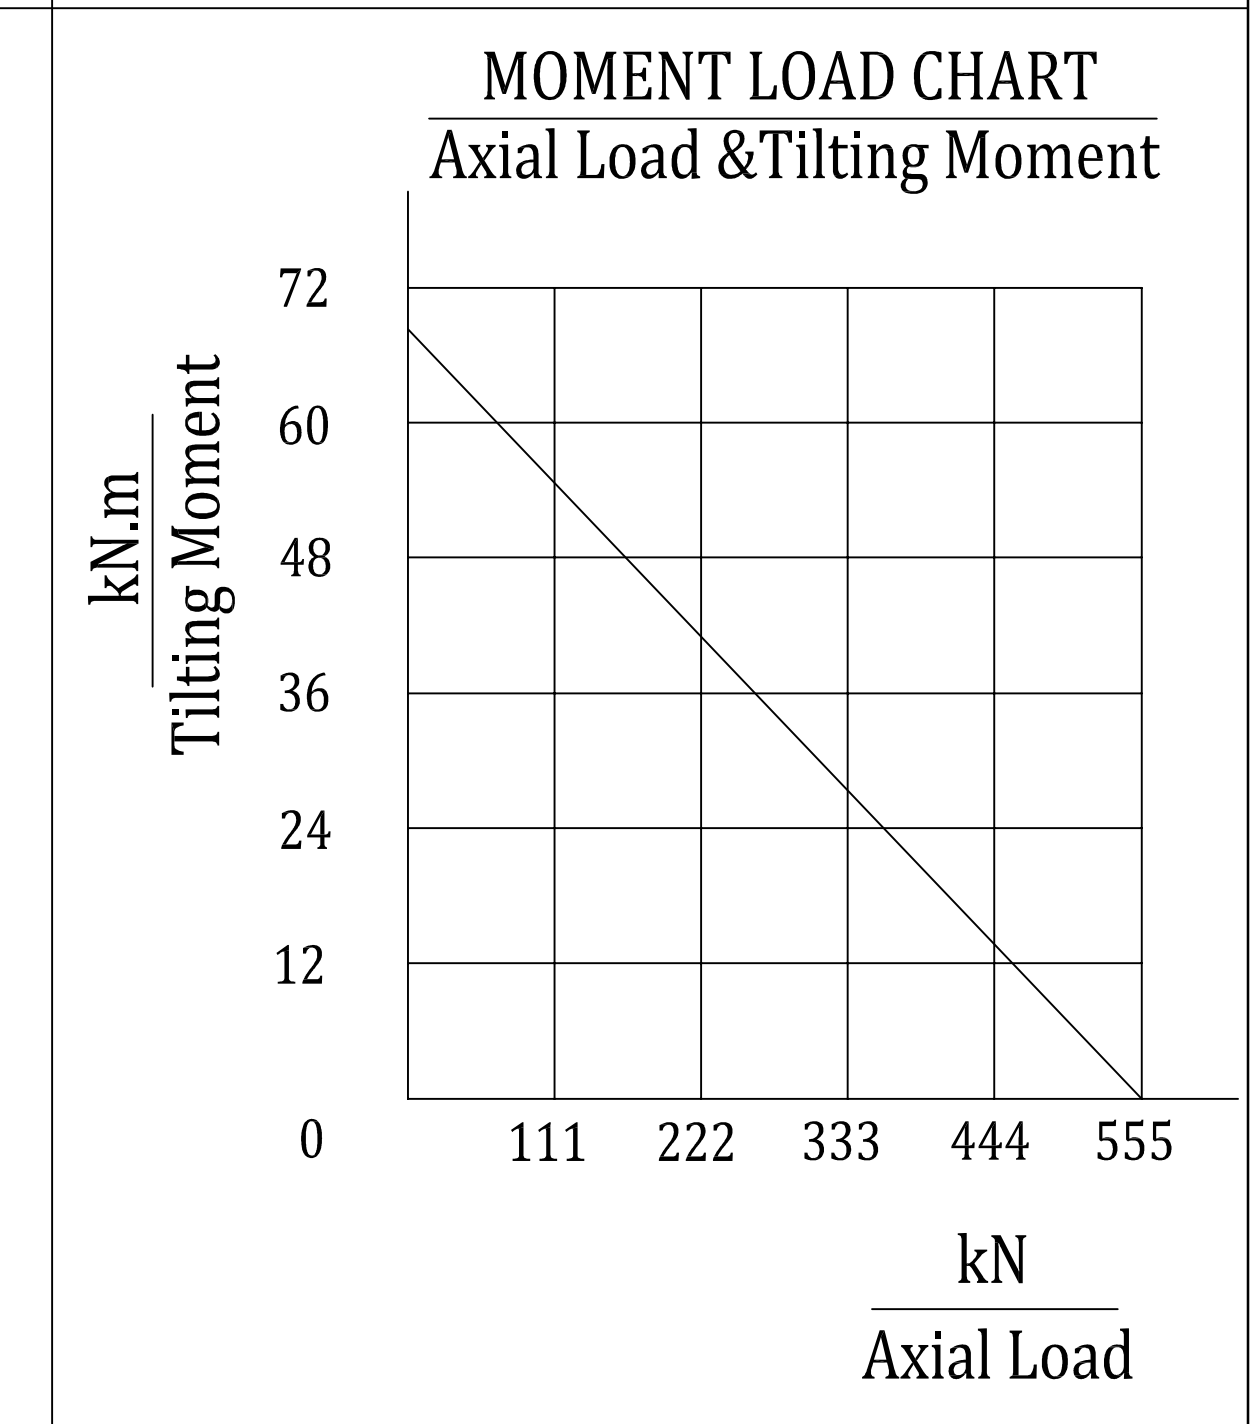
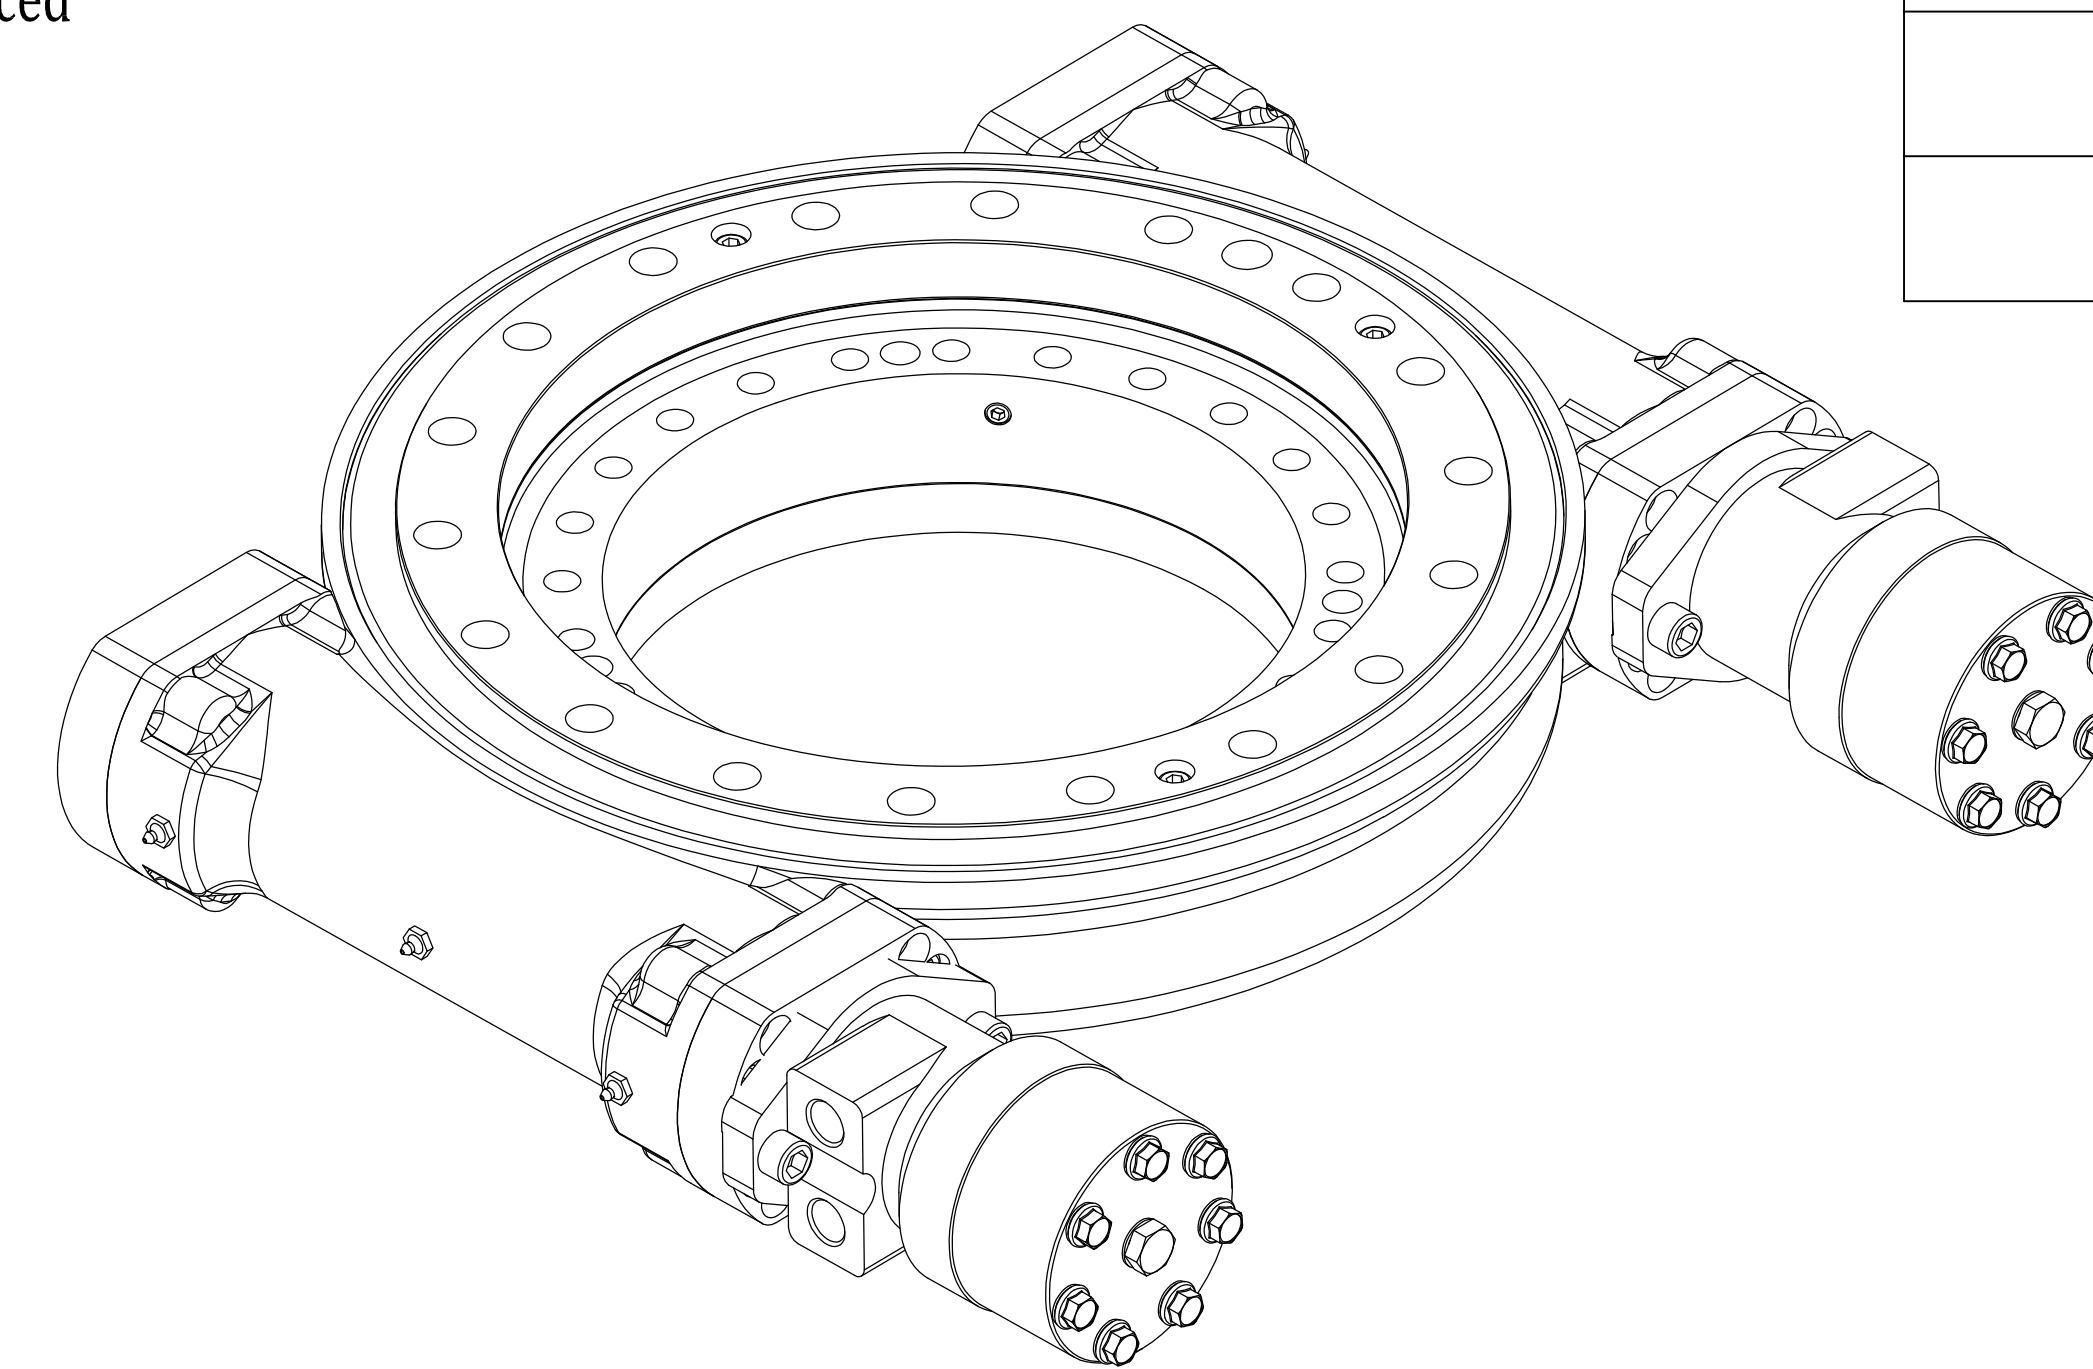




Hydraulic Motor Performance Data

BMR250 [253.5 cm ³ /rev.]														
Pressure (MPa)						continue (max.)		intermittent (max.)						
						5	7	9	10	12	14	16	17.5	20
Flow (L/min)	5	175	243	304	342	407								
		17	16	14	12	10								
	10	178	246	310	344	409	465	525						
		37	35	31	28	23	18	11						
	20	175	244	308	340	408	463	520	558	636				
		75	73	72	70	66	58	53	50	42				
	30	162	235	304	332	400	455	516	550	621				
		114	111	108	106	100	92	83	77	65				
	40	143	223	300	329	396	447	512	546	617				
		154	152	150	147	143	132	120	110	90				
	50	124	208	289	323	384	440	503	535	600				
		193	190	187	174	168	160	149	140	116				
60	103	192	280	314	371	426	489	514	578					
	233	230	227	224	218	205	190	181	155					
70	88	178	264	301	356	418	479	498	560					
	273	270	267	263	252	242	226	209	173					
75	62	165	256	288	347	412	474	486	542					
	294	291	287	283	274	263	249	236	211					

Torque (N.m) 621
Speed (rpm) 65

REV	DATE	REVISER	REVISER			
DESIGNED BY	2020/1/14	Li Ming	 www.coresundrive.com Coresun Drive Equipment Changzhou Co., Ltd.			
CHECKED BY	2020/1/14	Rui Wang				
APPROVED BY	2020/1/14	Shane Zhang				
ALL PROPRIETARY RIGHTS IN THE SUBJECT MATTER HERE OF ARE RESERVED, AND NO PERMISSION IS GRANTED OR TO DISCLOSE REPRODUCE THIS PRINT IN WHOLE OR IN PART, ANY OF THE INFORMATION TO OTHERS.			WEIGHT	SCALE	Slewing Drive	
			82 kg	1 : 3		
SYMBOLE ISO		SIZE	A3	WH14-2-85-RH-250A		REV
		SHEET	1 / 1			A